

MODERN SUITE



SPECIFICATIONS

Construction	LOOP
Pile Fiber Composition	100% Nylon (Polyamide 6)
Yarn Type	BCF
Dye Method	Solution Dyed
Pile Weight	18 oz/yd ²
Number of Tufts	236400/m ²
Tufting Gauge	1/10"
Primary Backing	Non-Woven
Secondary Backing	StableShield-100% Vinyl
Tile Size	19.6" x 19.6" (50 cm x 50 cm)
Pile Height	3.5 mm
Total Tile Height	6.5 mm
Pile Treatment	UV Treated Yarn, Walk of Fame
Recommended Installation	Quarter Turn or Brick




Giving your carpets a boost of soil-resisting properties with Walk of Fame. An anti-soiling treatment that increases the lifespan of your carpet. Technology meets practicality with this dirt-repelling treatment.



Performance Specifications

Wear Classification	Heavy Contract	
VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class 1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔL _w 23dB
Sound Absorption Level	EN ISO 11654	α _w : 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4
Smoke Density	EN ISO 9239-1:2002	<450

The above Information is subject to modification for the benefit of further improvement.

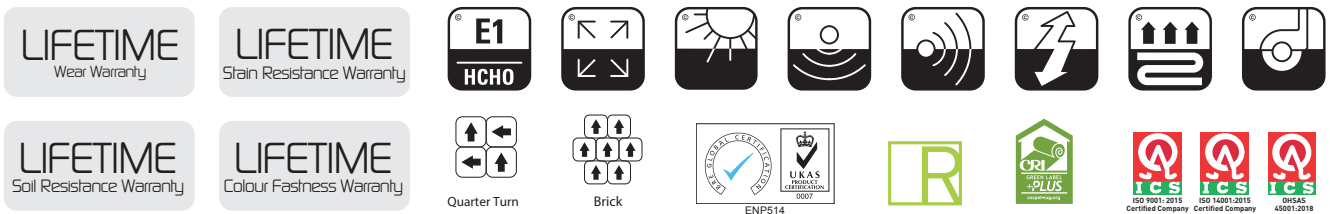

Standard Carpets Ind. LLC.
 Dubai Industrial Park, Dubai UAE
 Phone:+971 4 554 7137
 Fax:+971 4 554 7132
 Email: info@standardcarpets.com
 www.standardcarpets.com

Made in UAE by
 Standard Carpets.
 The largest manufacturer of tufted
 carpets and the only manufacturer
 of carpet tiles in the Emirates.

Standard Carpets are manufactured
 under the environmental quality
 system certified and complying with
 ISO 18001 by an accredited
 certification body.