

MIDLANDS





CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	785 g/m ²
NUMBER OF TUFTS	213300/m ²
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	StableShield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0 mm / 6.0 mm
TOTAL PILE HEIGHT	8.5 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (Optional)
RECOMMENDED INSTALLATION	Quarter Turn, Brick, Ashlar or Herringbone

SPECIFICATIONS

COLOURLINE



Midlands - 842



Midlands - 843




Midlands - 845



Midlands - 848



Midlands - 854



Midlands - 855



Midlands - 858



Midlands - 872



Midlands - 873



Midlands - 875




Midlands - 876




Midlands - 878



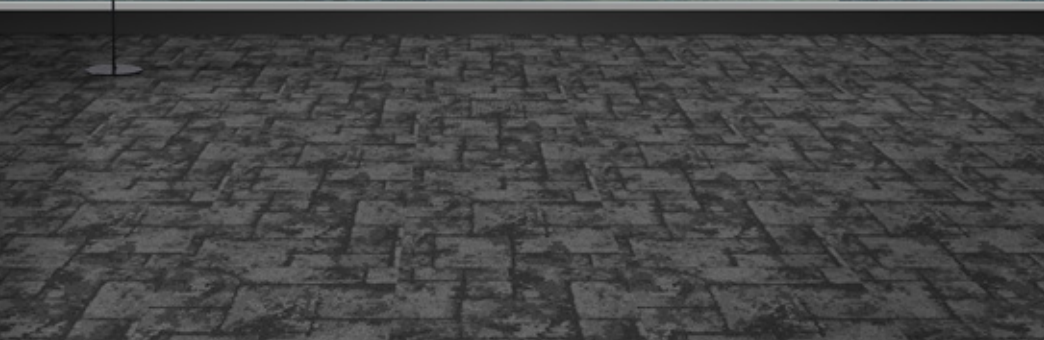


HOW TO INSTALL


QUARTER TURN

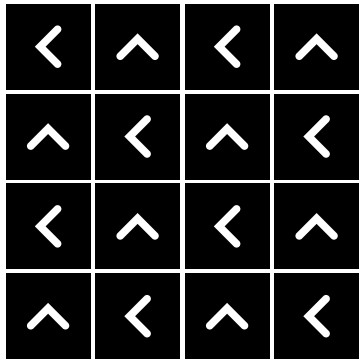


BRICK

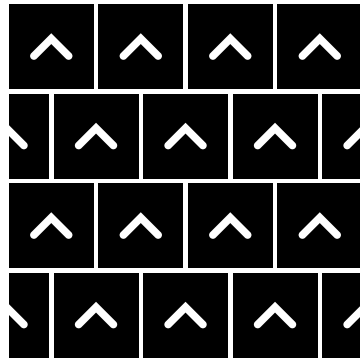

ASHLAR

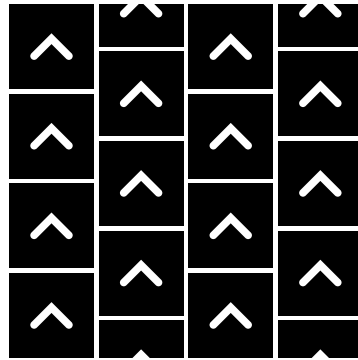

HERRINGBONE

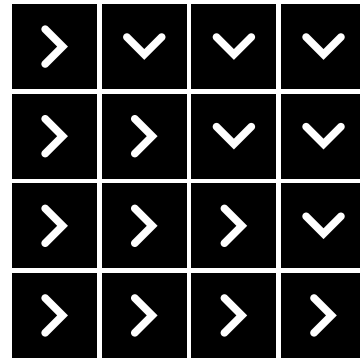



Standard
CARPETS

www.standardcarpets.com