



AmericanBiltrite
Flooring




ABPURE | RUBBER TILE

OCCUPANCY READY RUBBER

ABPURE

WITH NFUSE TECHNOLOGY

Informed flooring decisions based on science

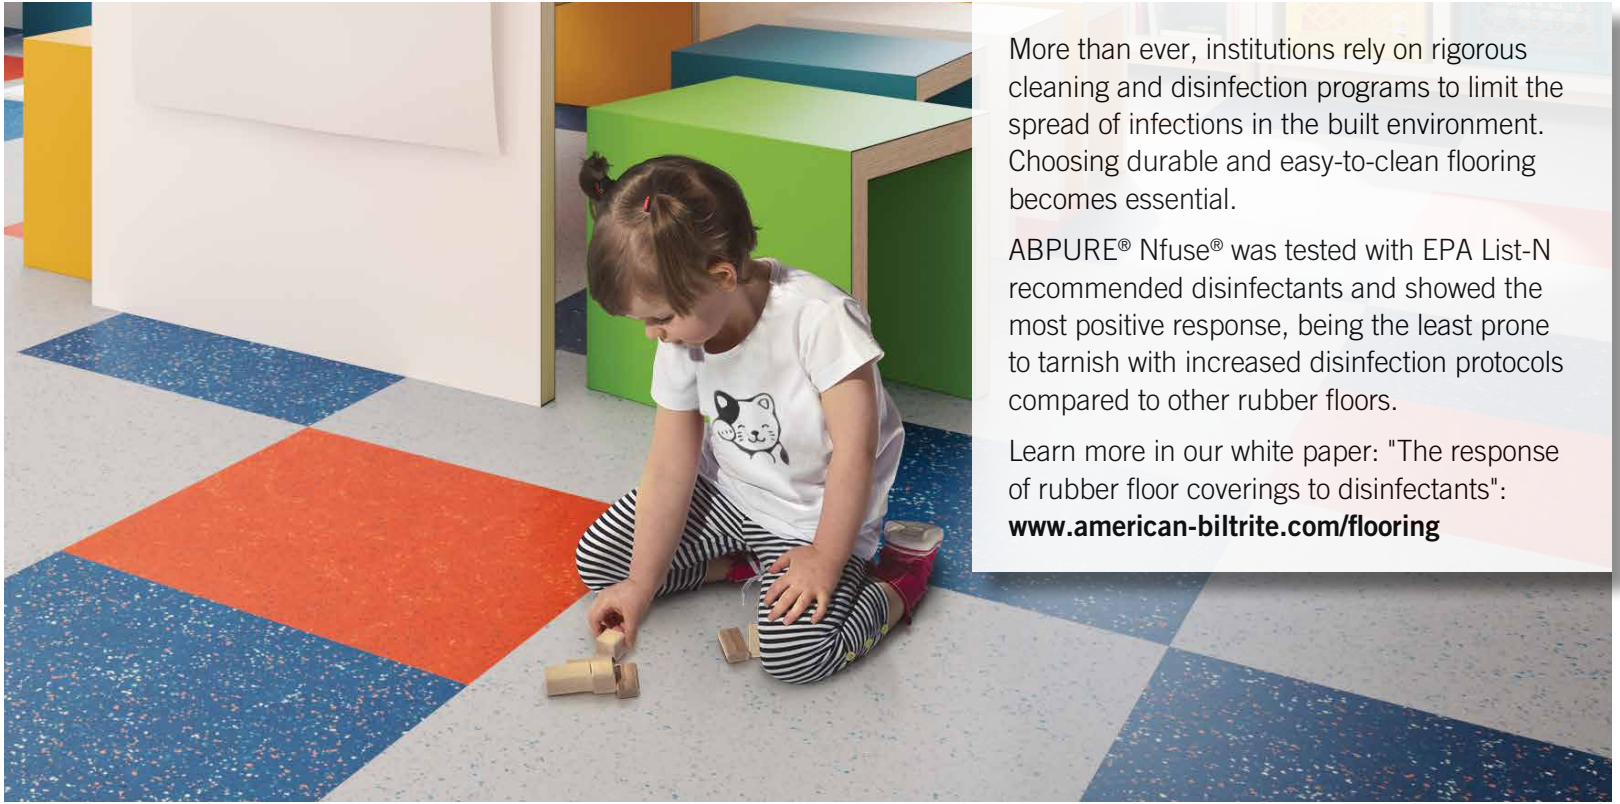

More than ever, institutions rely on rigorous cleaning and disinfection programs to limit the spread of infections in the built environment. Choosing durable and easy-to-clean flooring becomes essential.


ABPURE® Nfuse® was tested with EPA List-N recommended disinfectants and showed the most positive response, being the least prone to tarnish with increased disinfection protocols compared to other rubber floors.

Learn more in our white paper: "The response of rubber floor coverings to disinfectants":

www.american-biltrite.com/flooring

Nfuse®
technology

Nfuse technology is an overall product treatment technology that penetrates into the pores and seals the flooring.

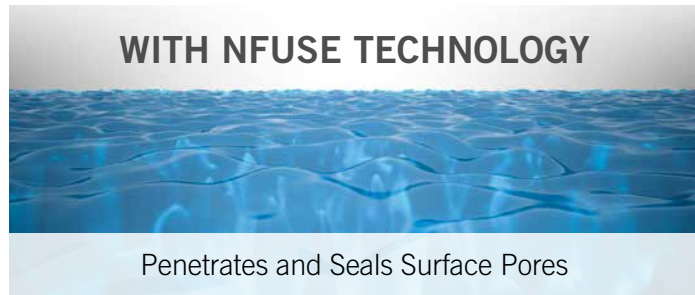

ABPURE Nfuse is an occupancy ready rubber flooring allowing to save time and money during installation and beyond - and is a better choice for environmental sustainability.

- No initial set-up required
- Immediate access
- No waxing, stripping or sealant, for the lifetime of the floor, which means no negative impact on wastewater systems and better indoor air quality
- Excellent stain and tarnish resistance

ABPURE[®] Nfuse[®]

It's PURE Science.




Nfuse Advantage

- Featuring the Nfuse patented technology that penetrates the pores and seals the rubber flooring



Easy to Clean & Disinfect

- Tested with EPA List-N disinfectants approved for use against SARS-Cov-2
- Superior color, stain and tarnish resistance
- Consult our white paper on the reaction of repeated disinfection protocols on resilient flooring at: www.american-biltrite.com/flooring

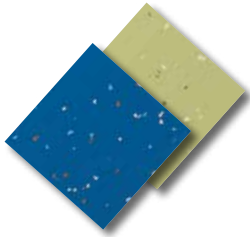

Exceptional PURE Colors

- Pure white, clean beiges and crisp blues that last
- Patented formulation that avoids color fading
- Best colorfastness and UV stability, meeting ASTM F 1515 requirements
- 10-year colorfastness guarantee
- NO Yellowing!



A Sustainable Choice

- Declare & Red List Free
- PVC free, chlorine free, phthalate free, no formaldehyde, and crystalline silica free
- FloorScore[®] certified for best indoor air quality
- Product specific EPD Type III

Declare.



Occupancy Ready

- No initial set-up, stripping, sealing, or waxing after installation and beyond
- Lower maintenance costs and reduced installation time
- No harmful impact on water waste management and better indoor air quality

Made in North America
since 1913

Reliable Supplier

- Essential supplier to the healthcare, transportation, and pharmaceutical industries
- Remained in operation during the Coronavirus pandemic with no supply chain disruptions
- Made it through two World Wars, the Great Depression, and the Spanish flu



Ergonomic Properties

- Better acoustic – reduced ambient noises
- More flexible, offering better comfort for feet and joints




ABPURE® Nfuse®

It's PURE Science.

10 Reasons to Choose ABPURE Nfuse:

- 1 **Occupancy ready rubber tile collection**
- 2 **A non-toxic and sustainable choice for the environment**
- 3 **No wax for life. Easy to maintain and disinfect with EPA list-N approved disinfectants**
- 4 **Saves time and money at installation and throughout the lifetime of the floor**
- 5 **Durable and resistant to heavy rolling load**
- 6 **Comfortable underfoot while offering superior sound reduction**
- 7 **Provides safety properties and peace of mind**
- 8 **Superior color stability and warranty**
- 9 **Highly flexible and easy to cover**
- 10 **Made in North America**

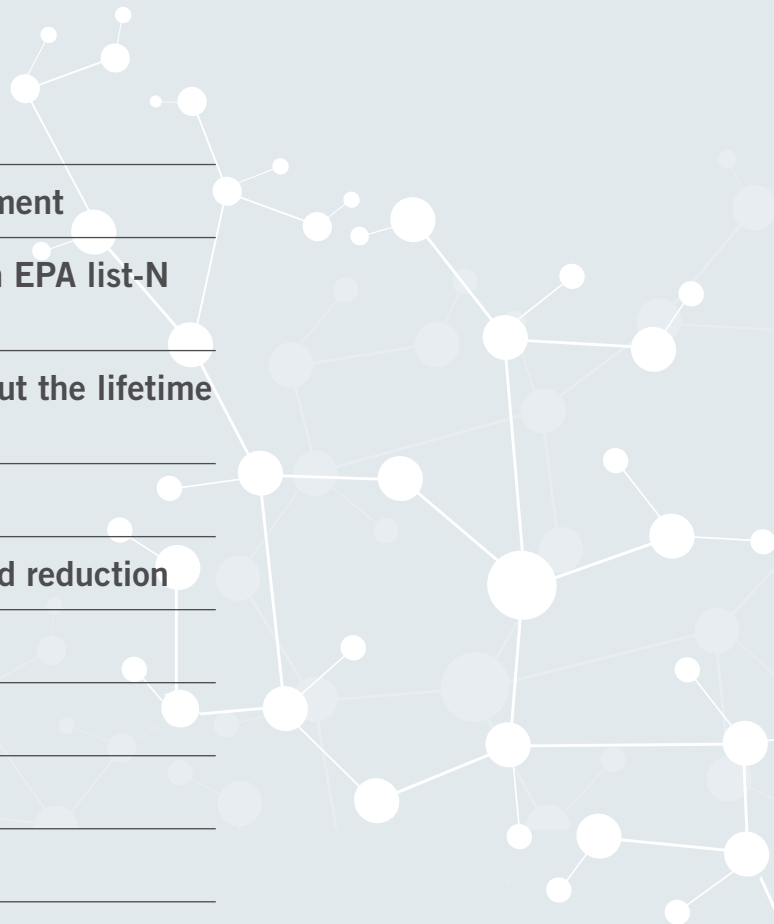

ABPURE IMAGINE - HAMMERED PROFILE (ABM)

ABM-38 Steel

To order use code **ABM** + color number.

Thickness: 3 mm (0.118")




■ 35" 11/16 nominal × 35" 11/16 (905 mm × 905 mm) 17" 13/16 nominal × 17" 13/16 (452 mm × 452 mm)

ABPURE IMAGINE - SMOOTH PROFILE (ABT)

ABT-33 Pebble Beach

To order use code **ABT** + color number.


Thickness: 2 mm (0.080") 3 mm (0.118")

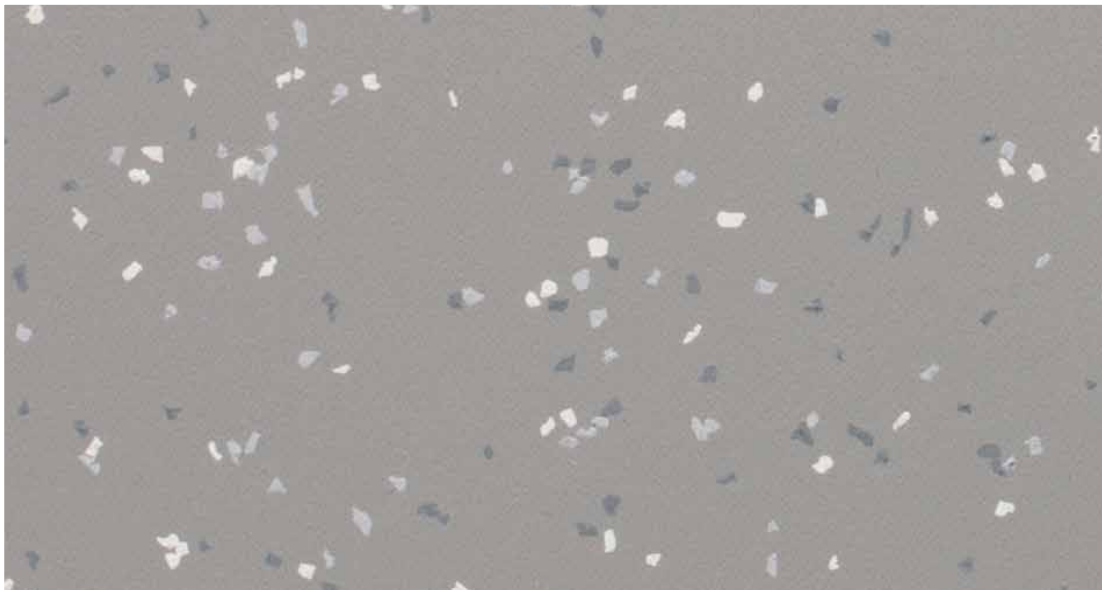

■ 35" 1/2 nominal × 35" 1/2 (900 mm × 900 mm) 17" 11/16 nominal × 17" 11/16 (450 mm × 450 mm)

ABPURE IMAGINE TILE COLORS


ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES

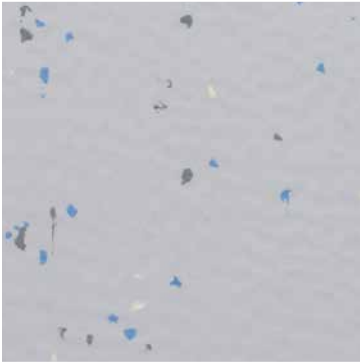


ABM-34 Glacier LRV 54.6



ABM-38 Steel LRV 25.0

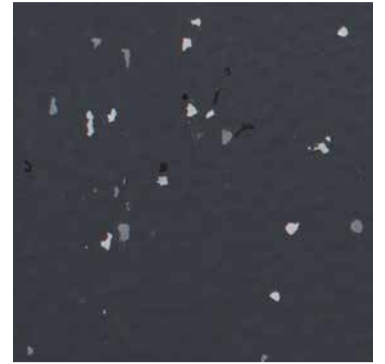


ABM-23 Anthracite LRV 10.9

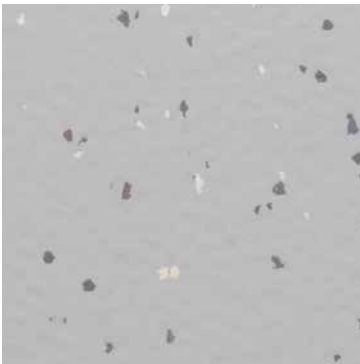

ABM-31 Gainsboro Valley LRV 53.9



ABM-33 Pebble Beach LRV 36.8

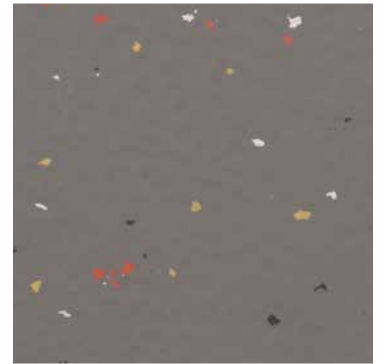


ABM-37 Battleship Gray LRV 24.0




ABM-41 Linen LRV 75.0




ABM-30 Sand Castle LRV 56.1

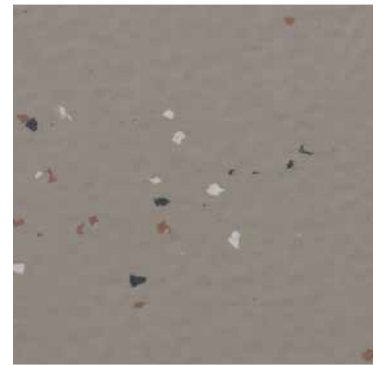


ABM-32 Appalachian Trail LRV 29.7

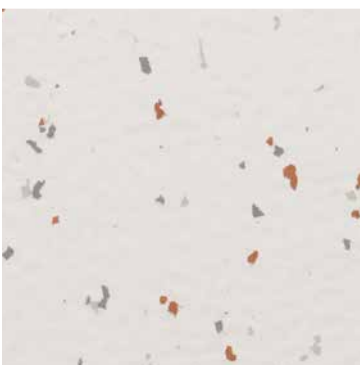

ABM-15 Snowstorm LRV 83.8

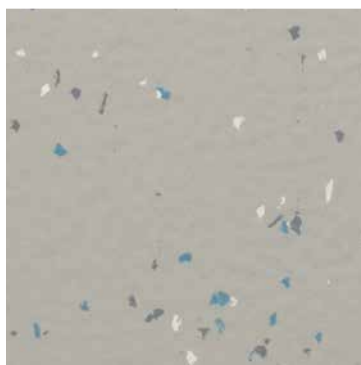


ABM-35 Ash Gray LRV 46.9

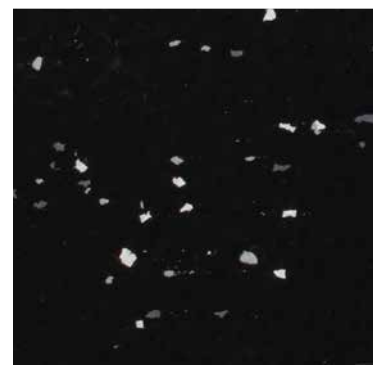


ABM-20 Starry Night LRV 5.1

ABPURE IMAGINE TILE COLORS


ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES

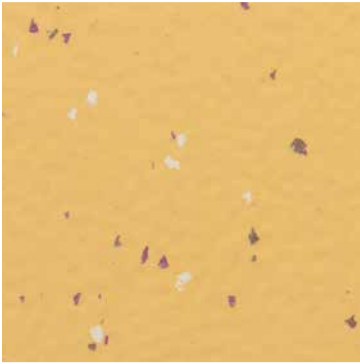


ABM-73 Banana Candy LRV 54.4

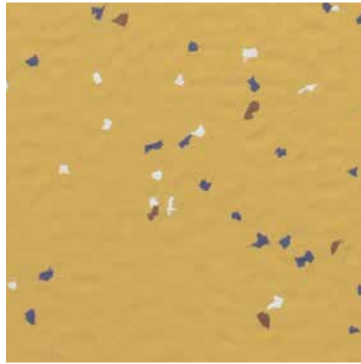


ABM-74 Buff LRV 47.2

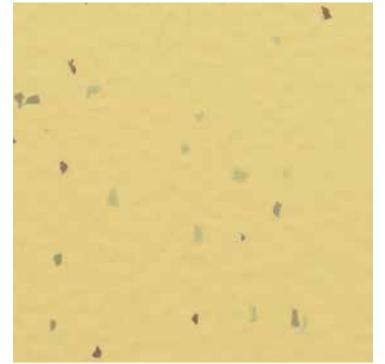


ABM-72 Limoncello LRV 62.6

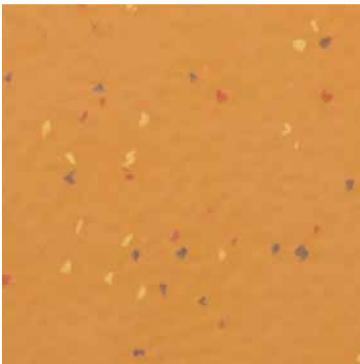


ABM-75 Orangerine LRV 37.1

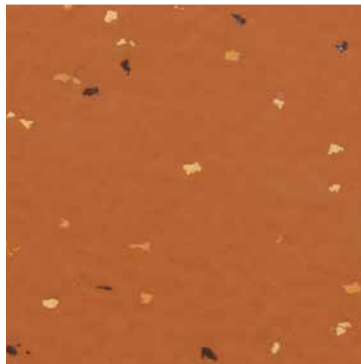


ABM-52 Terracotta LRV 24.7

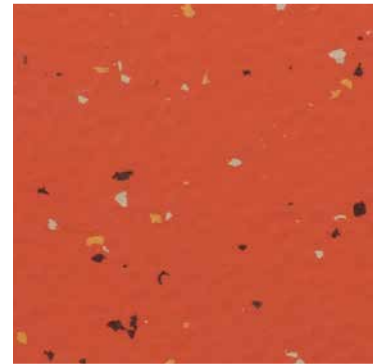

ABM-51 Capuchin LRV 24.5

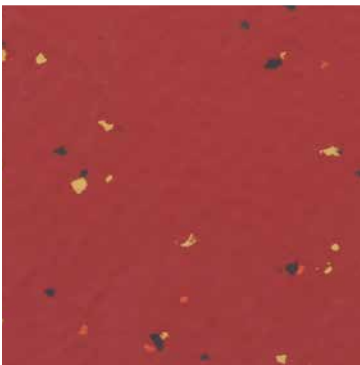


ABM-53 Land of Fire LRV 15.4

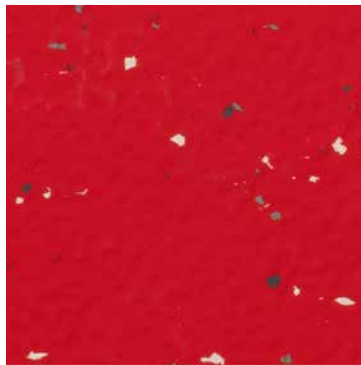


ABM-55 Fire Engine Red LRV 16.2




ABM-66 Doll House LRV 17.1

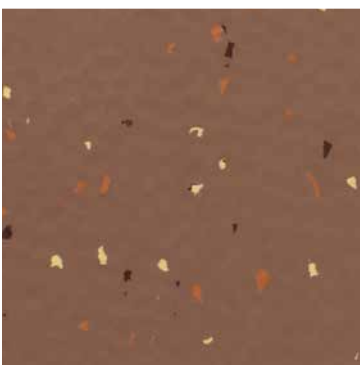

ABM-57 Chestnut LRV 20.6

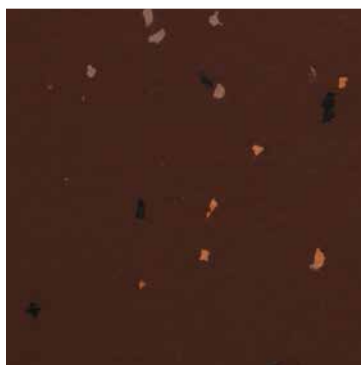


ABM-58 Espresso LRV 8.5

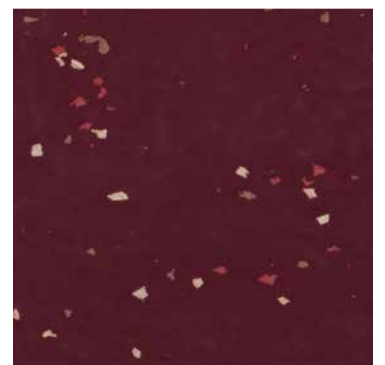

ABM-56 Shiraz LRV 7.7

ABPURE IMAGINE TILE COLORS


ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES

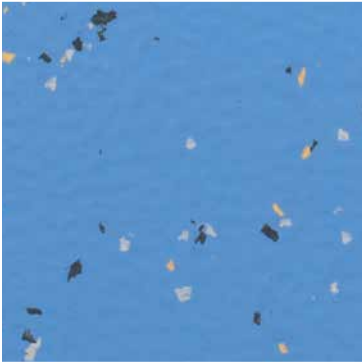

ABM-94 Forget-me-not LRV 30.7



ABM-95 Electric Blue LRV 15.2

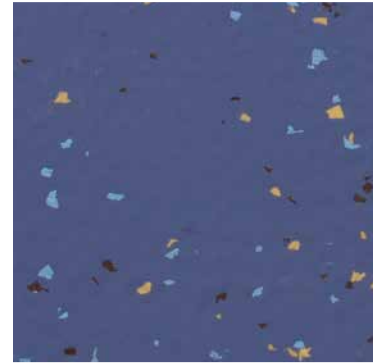

ABM-68 Rich Lavender LRV 17.0



ABM-90 Baby Blue LRV 38.4




ABM-92 Aquamarine LRV 29.1



ABM-98 Blue Lagoon LRV 9.8




ABM-83 Pistachio LRV 49.1

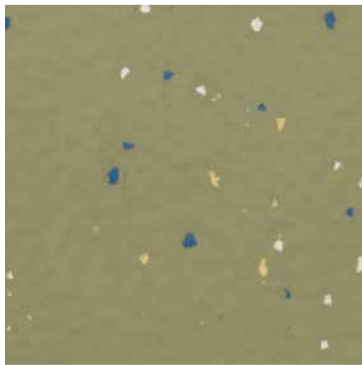


ABM-85 Olive Green LRV 31.6



ABM-87 Tundra LRV 23.5

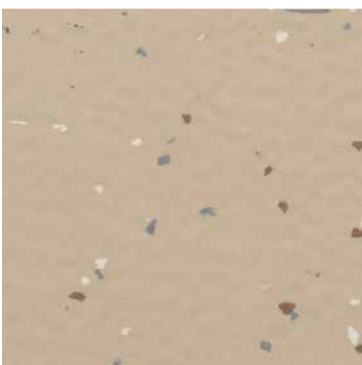

ABM-45 Wheat LRV 47.2

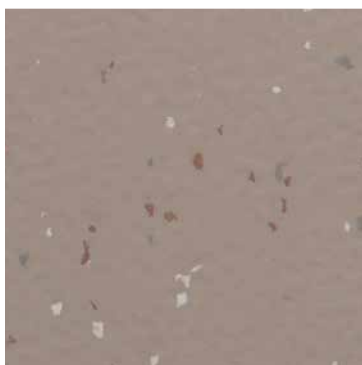


ABM-36 Tan LRV 31.4




ABM-39 Camouflage Green LRV 17.7

ABPURE IMAGINE TILE COLORS

ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES

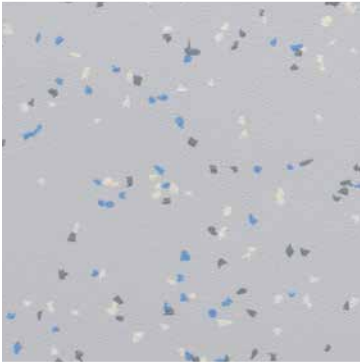


ABT-34 Glacier LRV 54.6

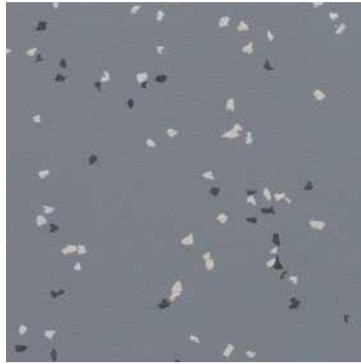


ABT-38 Steel LRV 25.0



ABT-23 Anthracite LRV 10.9

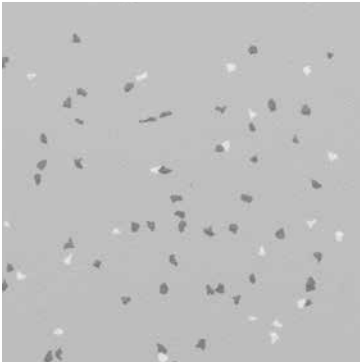

ABT-31 Gainsboro Valley LRV 53.9

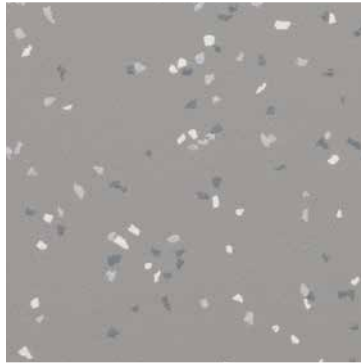


ABT-33 Pebble Beach LRV 36.8




ABT-37 Battleship Gray LRV 24.0



ABT-41 Linen LRV 75.0

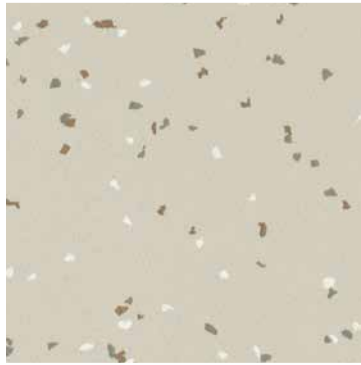

ABT-30 Sand Castle LRV 56.1

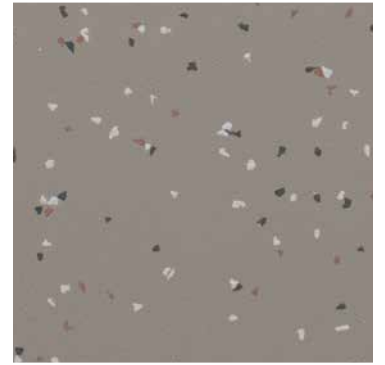


ABT-32 Appalachian Trail LRV 29.7



ABT-15 Snowstorm LRV 83.8



ABT-35 Ash Gray LRV 46.9

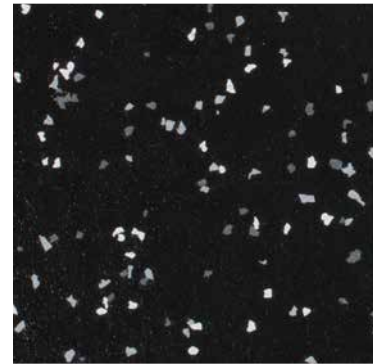


ABT-20 Starry Night LRV 5.1

ABPURE IMAGINE TILE COLORS


ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES



ABT-73 Banana Candy LRV 54.4

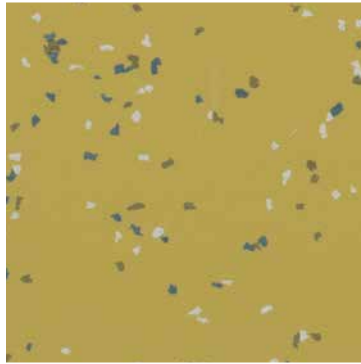


ABT-74 Buff LRV 47.2

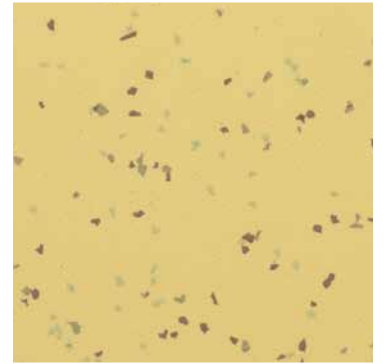

ABT-72 Limoncello LRV 62.6




ABT-75 Orangerine LRV 37.1

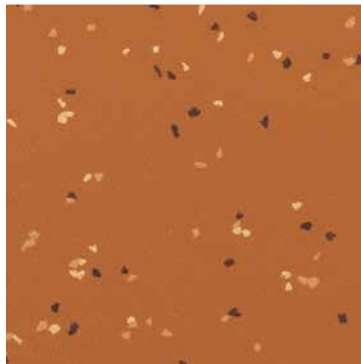

ABT-52 Terracotta LRV 24.7




ABT-51 Capuchin LRV 24.5

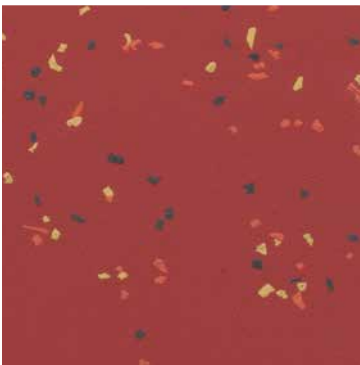

ABT-53 Land of Fire LRV 15.4




ABT-55 Fire Engine Red LRV 16.2

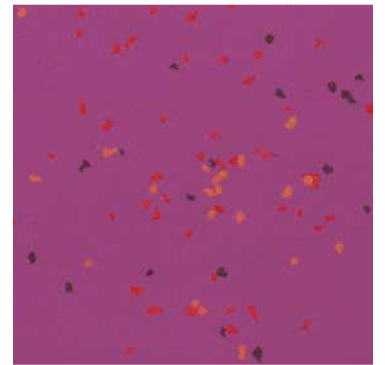

ABT-66 Doll House LRV 17.1



ABT-57 Chestnut LRV 20.6

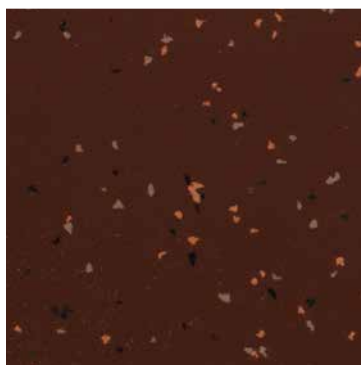

ABT-58 Espresso LRV 8.5




ABT-56 Shiraz LRV 7.7

ABPURE IMAGINE TILE COLORS


ALL COLORS ARE AVAILABLE IN HAMMERED (ABM) AND SMOOTH (ABT) PROFILES




ABT-94 Forget-me-not LRV 30.7

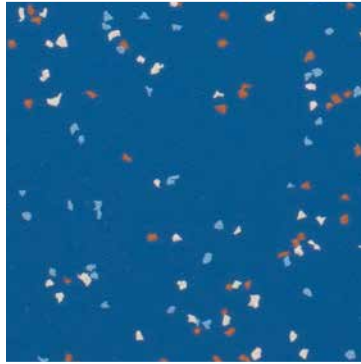


ABT-95 Electric Blue LRV 15.2

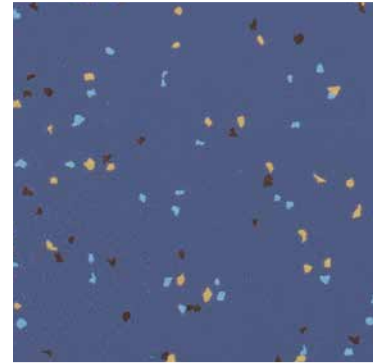

ABT-68 Rich Lavender LRV 17.0

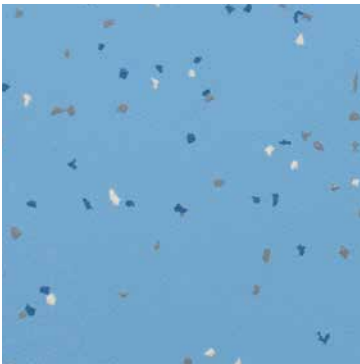

ABT-90 Baby Blue LRV 38.4

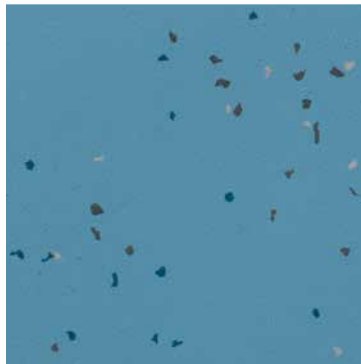

ABT-92 Aquamarine LRV 29.1



ABT-98 Blue Lagoon LRV 9.8



ABT-83 Pistachio LRV 49.1



ABT-85 Olive Green LRV 31.6




ABT-87 Tundra LRV 23.5




ABT-45 Wheat LRV 47.2



ABT-36 Tan LRV 31.4

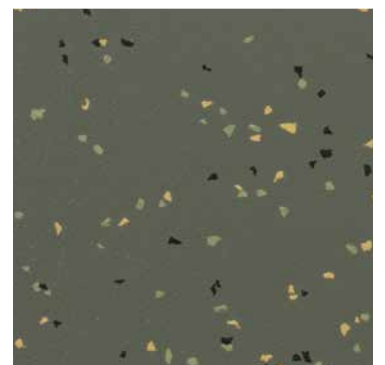

ABT-39 Camouflage Green LRV 17.7

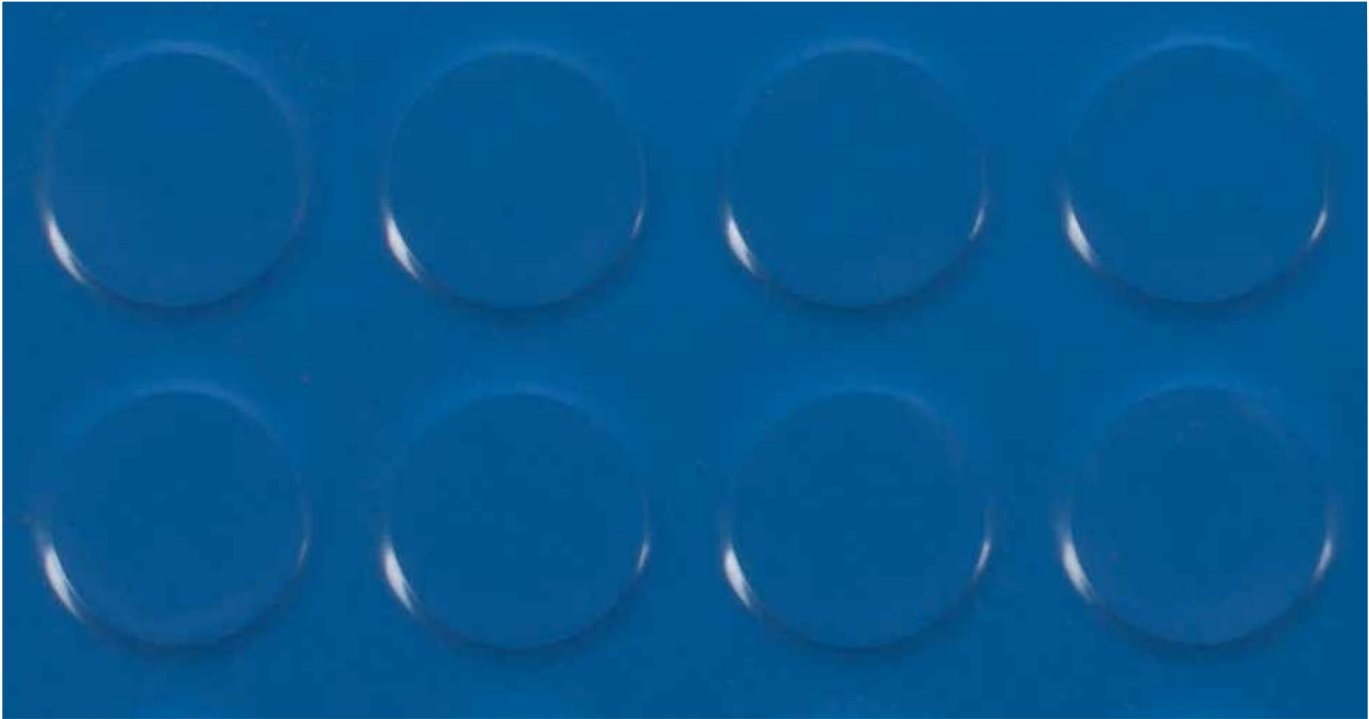

ABR-95 Electric Blue



**ABPURE
SOLID COLORS**

ABPURE SOLID COLORS - ROUND PROFILE (ABR)

35" 1/2 nominal x 35" 1/2 (900 mm x 900 mm) 17" 11/16 nominal x 17" 11/16 (450 mm x 450 mm)

Thickness 3 mm (0.118")



ABR-15
Snowstorm



ABR-31
Gainsboro Valley




ABR-34
Glacier




ABR-35
Ash Gray




ABR-33
Pebble Beach




ABR-32
Appalachian Trail



ABR-37
Battleship Gray



ABR-38
Steel



ABR-39
Camouflage Green



ABR-23
Anthracite



ABR-41
Linen




ABR-30
Sand Castle



ABR-45
Wheat




ABR-36
Tan




ABR-57
Chestnut



ABR-58
Espresso



ABR-56
Shiraz



ABR-20
Starry Night

ABPURE SOLID COLORS - ROUND PROFILE (ABR)

35" 1/2 nominal x 35" 1/2 (900 mm x 900 mm) 17" 11/16 nominal x 17" 11/16 (450 mm x 450 mm)


Thickness 3 mm (0.118")




ABR-73
Banana Candy




ABR-75
Orangerine



ABR-52
Terracotta



ABR-51
Capuchin




ABR-53
Land of Fire



ABR-72
Limoncello



ABR-74
Buff




ABR-83
Pistachio




ABR-85
Olive Green




ABR-87
Tundra




ABR-90
Baby Blue



ABR-92
Aquamarine



ABR-95
Electric Blue



ABR-98
Blue Lagoon



ABR-94
Forget-me-not



ABR-68
Rich Lavender



ABR-66
Doll House



ABR-55
Fire Engine Red

Color shown may vary according to production run.

Custom color program available upon request.

Minimum order required.



American Biltrite Flooring

ABPURE® RUBBER TILE WITH NFUSE TECHNOLOGY

TECHNICAL SPECIFICATIONS

Gauge	ABM, ABT ABT	3 mm 2 mm	0.118" 0.080"
Sizes	ABT ABT ABM ABM	900 mm x 900 mm 450 mm x 450 mm 905 mm x 905 mm 452 mm x 452 mm	35 1/2" X 35 1/2" 17 1/16" X 17 1/16" 35 1/16" X 35 1/16" 17 13/16" X 17 13/16"
Product Classification:			
ASTM F1344	Rubber Tile Floor	Type 1, A or B (Homogeneous)	
ASTM D2047	Static Coefficient of Friction (leather / neolite)	≥ 0.7 / ≥ 1.0	
ASTM D3389	Abrasion Resistance (H-18,500 g @ 1,000 cycles)	Pass	
ASTM E648	Critical Radiant Flux CRF (W/cm²)	≥ 0.45	
ASTM E662	Smoke Density	≤ 450	
ASTM E989 / E492	Sound Absorption (with a suspended ceiling)	IIC 59	
ASTM F925	Chemical Resistance	Exceeds	
ASTM F970	Static Load	≤ 0.005"	
ASTM F1514	Heat Stability	ΔE ≤ 8.0	
ASTM F1515	Light Stability	ΔE ≤ 8.0	
ASTM G21	Antimicrobial Resistance Test	Pass (28 days)	
Indoor Air Quality (IAQ):		FloorScore Certified by SCS Certification	
Volatile Organic Compounds (VOC's)		Registration Number SCS-FS-01492	
Adhesives:	AD-777 AD-590	Regular traffic Heavy rolling loads, under patients' beds, non-acclimatized entrance zones	
Limited Wear Warranty		10 years	
Resistance to oils and greases	ABPURE® is not recommended for environments where it could be exposed to oils and greases, whether mineral, animal or vegetable.		
Antimicrobial	IMPORTANT: All our ABPURE rubber flooring, through its composition and without the use of antimicrobial chemicals, does not promote microbial growth.		



Please note that technical website documents prevail.

american-biltrite.com

® / ABPURE is a registered trademark of American Biltrite
® / Nfuse is a registered trademark of American Biltrite



American Biltrite, 200 Bank Street, Sherbrooke, Quebec, Canada J1H 4K3
To order samples: flooring@american-biltrite.com | 1-800-437-8743 | Fax 1-800-810-5731 | Technical Services: 1-800-479-0190

Printed in Canada FOL-E3-HST Issued: 8/2023