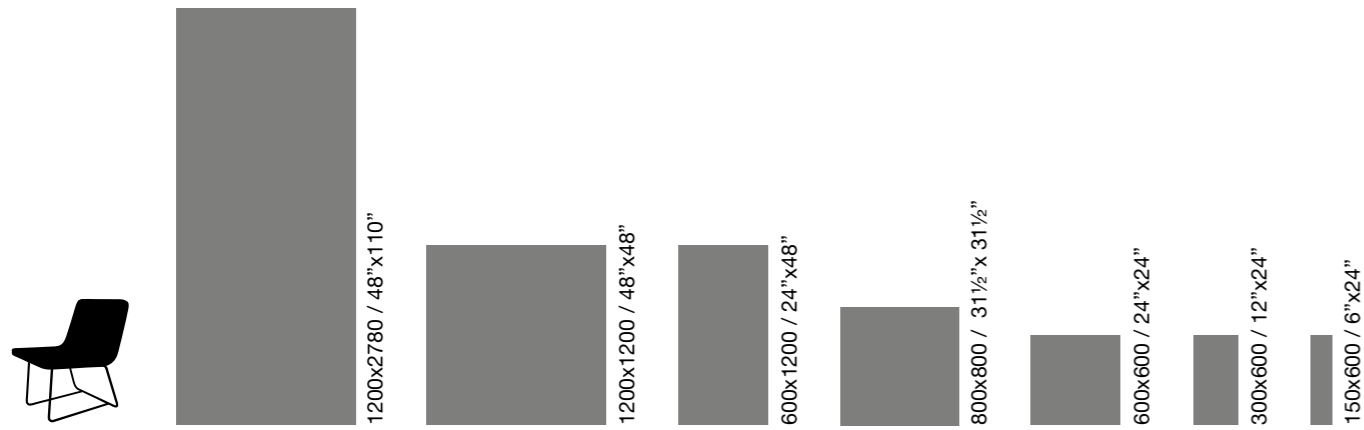


CENTURA

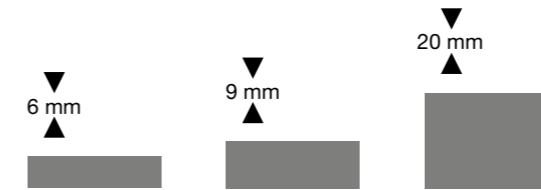
LEMMY
SHINING DESIGN

MIRAGE®
Porcelain. Design. Sustainability

SIZES



THICKNESSES



FINISHES

- SPAZZOLATA
- NATURALE
- STROTTORATA



**LY01
PALLADIUM**

**LY02
NIMBUS**

**LY03
EXCALIBUR**

**LY09
KING**

**LY04
VENOM**

**LY05
AFTERGLOW**

**LY08
PUMPKIN**

**LY07
INDIO**

**LY06
VIRIDIUM**

PALLADIUM LY01

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ

600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

Stucchi consigliati Recommended grouts

KERAKOLL	02 Grigio Luce	
MAPEI	111 Grigio Argento	
LATICRETE	88 Silver Shadow	

Shade variation



Substantial variation



NIMBUS LY02

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ

600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

20 mm
EVO 2/e

800x800 / 31½"x 31½"
SP SQ

Stucchi consigliati Recommended grouts

KERAKOLL	03 Grigio Perla	
MAPEI	110 Manhattan	
LATICRETE	89 Smoke Grey	

Shade variation



Substantial variation



EXCALIBUR LY03

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ

600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

20 mm
800x800 / 31½"x 31½"
SP SQ

Stucchi consigliati
Recommended grouts

KERAKOLL	04 Grigio Ferro
MAPEI	112 Grigio Medio
LATICRETE	78 Sterling Silver

Shade variation



Substantial variation



KING LY09

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ

600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

20 mm
800x800 / 31½"x 31½"
SP SQ

Stucchi consigliati
Recommended grouts

KERAKOLL	05 Antracite
MAPEI	114 Antracite
LATICRETE	45 Raven

Shade variation



Substantial variation



VENOM LY04

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ

600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

20 mm
800x800 / 31½"x 31½"
SP SQ

Stucchi consigliati
Recommended grouts

KERAKOLL	05 Antracite	
MAPEI	114 Antracite	
LATICRETE	45 Raven	

Shade variation



Substantial variation



AFTERGLOW LY05

6 mm
1200x2780 / 48"x110"
SP SQ

9 mm
1200x1200 / 48"x48"
SP SQ

600x1200 / 24"x48"
SP SQ

800x800 / 31½"x 31½"
SP SQ




600x600 / 24"x24"
SP SQ - NAT SQ

300x600 / 12"x24"
SP SQ - NAT SQ

150x600 / 6"x24"
SP SQ

Tutti i formati in 9 mm NAT sono realizzati con la tecnologia PERFORMA.
All 9 mm NAT sizes are produced with PERFORMA technology.

Stucchi consigliati
Recommended grouts

KERAKOLL	03 Grigio Perla	
MAPEI	110 Manhattan	
LATICRETE	89 Smoke Grey	

Shade variation



Substantial variation



VIRIDIUM
LY06

9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	05 Antracite	
MAPEI	114 Antracite	
LATICRETE	45 Raven	

Shade variation



Substantial variation

INDIO
LY07

9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	05 Antracite	
MAPEI	114 Antracite	
LATICRETE	45 Raven	

Shade variation



Substantial variation

PUMPKIN
LY08

9 mm

600x1200 / 24"x48"
SP SQ

600x600 / 24"x24"
SP SQ

300x600 / 12"x24"
SP SQ

150x600 / 6"x24"
SP SQ



Stucchi consigliati
Recommended grouts

KERAKOLL	04 Grigio Ferro
MAPEI	112 Grigio Medio
LATICRETE	78 Sterling Silver

Shade variation



Substantial variation

FLOOR . PUMPKIN LY 08 SP 600X600 / 24"X24"



RIASSUNTIVO FORMATI E IMBALLI
SUMMARY OF SIZES AND PACKAGING
ÜBERSICHT ÜBER FORMATE UND VERPACKUNGEN
RÉCAPITULATIF FORMATS ET EMBALLAGES
SINÓPTICO DE FORMATOS Y EMBALAJES
规格和包装概述


150x600 6"x24"	300x600 12"x24"	600x600 24"x24"	800x800 31½"x31½"	600x1200 24"x48"	1200x1200 48"x48"	1200x2780 48"x110"	Crystal 1200x2780 48"x110"	800x800 31½"x31½"	Mosaico 36T* 300x300 12"x12"	Plume 300x300 12"x12"	Foliage 323x305 12¾"x12"

FORMATI - SIZES **DECORI - DECORS**









Spessore - Thickness	9 mm		9 mm		9 mm		9 mm		9 mm		9 mm		6 mm		20 mm	
Superficie - Surface	SP SQ	SP SQ	NAT SQ	SP SQ	NAT SQ	SP SQ	SP SQ	SP SQ	SP SQ	SP SQ	ST SQ	SP	SP	SP	SP	
Palladium LY 01	AR5V	UR56	AQQ8	UP94	AQP9	AHZ9	UQ03	ADY2	US07	-	-	ADC6	ADF0	ADD4		
Nimbus LY 02	AR5W	UR57	AQQ9	UP95	AQQ0	AIA0	UQ04	ADY5	US08	ADM1	A	ADC7	ADF1	ADD5		
Excalibur LY 03	AR5X	UR58	AQR0	UP96	AQQ1	AIA1	UQ05	ADY6	US09	-	A	ADC8	ADF2	ADD6		
King LY 09	AFZ3	AFZ2	AQR6	AFZ1	AQQ7	AIA4	AFZ4	AHG6	AHG1	-	A	AIC5	AID7	AID8		
Venom LY 04	AR5Y	UR59	AQR1	UP97	AQQ2	AIA2	UQ06	ADY7	US10	-	A	ADC9	ADF3	ADD7		
Afterglow LY 05	AR5Z	UR60	AQR2	UP98	AQQ3	AIA3	UQ07	ADY8	US11	-	-	ADD0	ADF4	ADD8		
Viridium LY 06	AR6A	UR61	-	UP99	-	-	UQ08	-	-	-	-	ADD1	ADF5	ADD9		
Indio LY 07	ADM5	UR62	-	UQ01	-	-	UQ10	-	-	-	-	ADD2	ADF6	ADE0		
Pumpkin LY 08	AR6B	UR63	-	UQ02	-	-	UQ11	-	-	-	-	ADD3	ADF7	ADE1		











Peso lordo per scatola Gross weight per box Bruttogewicht pro Karton Poids brut par boîte Peso bruto por caja Вес брутто коробки	26,92	26,18	22,50	27,36	32,29	61,56	Please refer to: mirage.it	-	-	-	
Pezzi per scatola Pieces for box Stück pro Karton Pièces pour boîte Piezas por caja Штук в коробке	14	7	3	2	2	2		1	6	6	6
mq. scatola mq. box mq. Karton mq. boîte mq. caja кв.м в коробке	1,26	1,26	1,08	1,28	1,44	2,88		-	-	-	-
Scatole / full pallet Boxes / full pallet Stück / volle Palette Pièces / palette complete Cajas / pallet completo Коробок в паллете	40	40	40	48	35	16		-	-	-	-
mq./pallet	50,40	50,40	43,20	53,76	50,40	46,08		-	-	-	-

A: Disponibile - Available
 * Decoro su rete - Mesh-backed decoration
 SP: Spazzolata




RIASSUNTIVO FORMATI E IMBALLI
SUMMARY OF SIZES AND PACKAGING
ÜBERSICHT ÜBER FORMATE UND VERPACKUNGEN
RÉCAPITULATIF FORMATS ET EMBALLAGES
SINÓPTICO DE FORMATOS Y EMBALAJES
规格和包装概述

 Battiscopa 72x600 27/8"x24"	 Battiscopa 72x800 27/8"x32"	 Gradino B Ang. 330x330 13 1/8"x13 1/8"	 Gradino B 330x600 13 1/8"x24"	 Gradino B 330x1200 13 1/8"x48"	 Gradino A 300x600 12"x24"	 Gradino A 300x1200 12"x48"	 Gradino G 300x600 12"x24"
--	--	---	---	--	--	---	--

Spessore - Thickness										
Superficie - Surface		SP	SP	SP	SP	SP	SP	SP	SP	SP
	Palladium LY 01	ADB8	ALG7	ACX0	ACX8	ACY6	ACZ4	ADA2	ADB0	
	Nimbus LY 02	ADB9	ALG8	ACX1	ACX9	ACY7	ACZ5	ADA3	ADB1	
	Excalibur LY 03	ADC0	ALG9	ACX2	ACY0	ACY8	ACZ6	ADA4	ADB2	
	King LY 09	AIQ9	ALH2	AIQ3	AIQ4	AIQ5	AIQ6	AIQ8	AIQ7	
	Venom LY 04	ADC1	ALH0	ACX3	ACY1	ACY9	ACZ7	ADA5	ADB3	
	Afterglow LY 05	ADC2	ALH1	ACX4	ACY2	ACZ0	ACZ8	ADA6	ADB4	
	Viridium LY 06	ADC3	-	ACX5	ACY3	ACZ1	ACZ9	ADA7	ADB5	
	Indio LY 07	ADC4	-	ACX6	ACY4	ACZ2	ADA0	ADA8	ADB6	
	Pumpkin LY 08	ADC5	-	ACX7	ACY5	ACZ3	ADA1	ADA9	ADB7	
	Pezzi per scatola Pieces for box Stück pro Karton Pièces pour boîte Piezas por caja Штук в коробке	10	10	4	4	2	7	4	7	

A: Disponibile - Available
 * Decoro su rete - Mesh-backed decoration
 SP: Spazzolata



PERFORMA

TECHNOLOGY

Mirage PERFORMA è la tecnologia in grado di unire alle prestazioni più elevate il massimo grado di ricerca estetica.

Le lastre Mirage PERFORMA si caratterizzano infatti per un effetto particolarmente morbido al tatto, garantendo un elevato coefficiente di scivolosità.

Mirage PERFORMA is a technology able to combine top performance with the very best in style research.

The hallmark of Mirage PERFORMA slabs is their particularly soft, smooth feel, with high slip resistance ratings.

ADVANTAGES/VANTAGGI



La superficie delle collezioni PERFORMA è particolarmente morbida e vellutata al tatto.

The surface of the PERFORMA collections are particularly soft and smooth to the touch.



PERFORMA garantisce un'elevata resistenza allo scivolamento, con coefficiente di scivolosità R10 A+B.

Performa guarantees excellent slip resistance, with a R10 A+B rating.


















Nessuna rinuncia nell'estetica, che rimane ricca e dettagliata.

And the style remains richly detailed.

Per saperne di più | More information
www.mirage.it

STANDARD EN 14411 - G

	CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERÍSTICAS TÉCNICAS CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ 技术特征	NORMA STANDARD NORM NORME NORMA ЗНАЧЕНИЯ СТАНДАРТА 标准	VALORI PRESCRITTI DALLE NORME EN 14411 - G INTERNATIONAL STANDARDS EN 14411 - G INTERNATIONALE NORMWERTE EN 14411 - G VALEURS PREVUES PAR LES NORMES EN 14411 - G VALORES PREVISTOS POR LAS NORMAS EN 14411 - G ПРЕДУСМОТРЕННЫЕ СТАНДАРТОМ EN 14411-G EN 14411 - G标准规定值	*VALORE MEDIO MIRAGE MIRAGE AVERAGE VALUE MIRAGE MITTELWERT VALEURS MOYEN MIRAGE VALOR MEDIO MIRAGE СРЕДНЕЕ ЗНАЧЕНИЕ MIRAGE MIRAGE平均值		
	CARATTERISTICHE DIMENSIONALI - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN DETERMINATION DES CARACTERISTIQUES DIMENSIONNELLES - CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征					
	LATI SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН - 側邊	EN ISO 10545-2	± 0,3% MAX (± 1,0 mm MAX)	CONFORME COMPLYING		
	SPESSORE THICKNESS - DICKE EPAISSEUR - ESPESOR ТОЛЩИНА - 厚度	EN ISO 10545-2	± 5,0% MAX (± 0,5 mm MAX)	CONFORME COMPLYING		
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTIDUD DE LOS CANTOS КОСОУГОЛЬНОСТЬ - 边角平直度	EN ISO 10545-2	± 0,3% MAX (± 0,8 mm MAX)	CONFORME COMPLYING		
	ORTOGONALITÀ RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРИВИЗНА СТОРОН - 直角度	EN ISO 10545-2	± 0,3% MAX (± 1,5 mm MAX)	CONFORME COMPLYING		
	PLANARITÀ SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度	EN ISO 10545-2	± 0,4% MAX (± 1,8 mm MAX)	CONFORME COMPLYING		
	ASSORBIMENTO D'ACQUA WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ - 吸水率	EN ISO 10545-3	≤ 0,5%	≤ 0,1%		
	RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE - BIEGEFESTIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (> 7,5 mm) R ≥ 35 N/mm ² .	≠ 6 mm: S ≥ 1.100 N R ≥ 48 N/mm ² ≠ 9 mm: S ≥ 2.400 N R ≥ 48 N/mm ² ≠ 20 mm: S ≥ 12.500 N R ≥ 48 N/mm ²		
	RESISTENZA ALL'URTO IMPACT RESISTANCE - STOSSFESTIGKEIT RESISTANCE AUX CHOCES - RESISTENCIA A LOS GOLPES УДАРОСТОЙКОСТЬ - 抗冲击强度	EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE	> 0,80		
	RESISTENZA ALL'ABRASIONE ABRASION RESISTANCE - ABRIEFESTIGKEIT RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度	EN ISO 10545-6	≤ 175 mm ³	< 150 mm ³		
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL-EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFICIENTE DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数	EN ISO 10545-8	—	α=6,6x10 ⁻⁶ °C ⁻¹		
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCES THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性	EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	RESISTENZA AL GELO FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ - 耐冻性	EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	RESISTENZA ALL'ATTACCO CHIMICO RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT RESISTANCE A L'ATTAQUE CHIMIQUE - RESISTENCIA QUÍMICA ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用	EN ISO 10545-13	B MIN.	A LA HA		
	RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性	EN ISO 10545-14	VALORE DICHIARATO DECLARED VALUE	5		
	CESSIONE DI PIOMBO E CADMIO LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ - 铅和镉的排放	EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE	< AL LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT		
			SP	NAT	ST (20 mm)	
		DM. 236/89 BCRA	> 0,40	0,40	0,40	-
		ASTM C1028	SCOF > 0,60	0,60	0,60	-
		ANSI A137.1	Wet DCOF > 0,42	0,42	0,42	-
		AS 4586:2013	-	P2	-	-
		BS7976 - Gom.45 - Slid.96	Dry -	-	-	-
		BS7976 - Gom.45 - Slid.96	Wet -	-	-	-
		BS7976 - Gom.TRL - Slid.55	Dry -	-	-	-
		BS7976 - Gom.TRL - Slid.55	Wet -	-	-	-
		DIN 51130	-	R9	R10	R11
		DIN 51097	-	-	A+B	A+B+C
		ENV 12633	≥ CL1	-	-	-
		BS 7976	≥ 36	-	-	-

Per i certificati specifici, contattare Mirage SpA - For specific certificates, please contact Mirage SPA - Für die speziellen Zertifikate wenden Sie sich bitte an Mirage SpA - Pour les certificats spécifiques, veuillez contacter Mirage SPA
Para los certificados específicos, contactar Mirage SPA - Для сертификатов обращайтесь в компанию Mirage SpA - 关于具体的证书, 请联系Mirage Spa公司